



Ultra-Fast Recovery EPI Rectifier Diodes

Reverse Voltage - 1200 Volts

Forward Current - 30 Amperes



Features

- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7s, per JESD 22-B106

Mechanical data

- Case: TO-247-2L
- pprox. Weight: 6.0g (0.21oz)
- Lead free finish, RoHS compliant
- Case Material: “Green” molding compound, UL flammability classification 94V-0, “Halogen-free”.

TO-247-2L

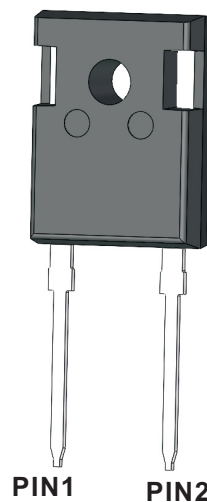

Maximum Ratings And Electrical Characteristics

Ratings At 25°C Ambient Temperature Unless Otherwise Specified

Parameter	Symble	MUR30120W	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1200	V
Average Rectified Output Current @60Hz half sinewave, R-load, Tc(FIG.1)	I_O	30	A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	300	A
Max Instantaneous Forward Voltage at 30 A	V_F	3.5	V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 125^\circ\text{C}$	I_R	10 500	μA
Typical Thermal Resistance	$R_{\theta JC}$	0.4	$^\circ\text{C/W}$
Maximum Reverse Recovery Time (1)	t_{rr}	60	ns
Operating Junction Temperature Range	T_j	-55 ~ +175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 ~ +175	$^\circ\text{C}$

(1) $I_F=0.5\text{A}, I_R=1\text{A}, I_{RR}=0.25\text{A}$



Fig.1 Forward Current Derating Curve

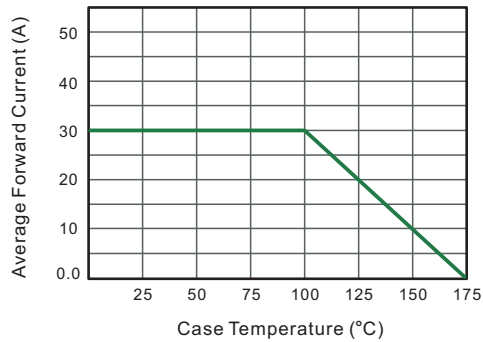


Fig.2 Typical Instantaneous Reverse Characteristics

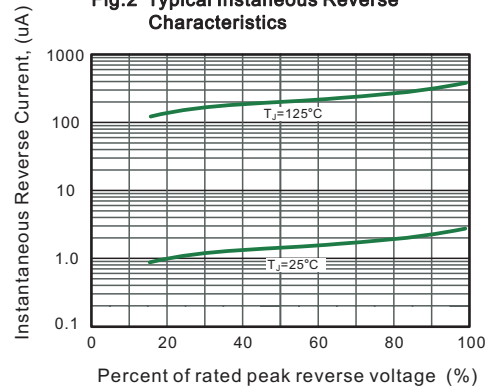


Fig.3 Typical Forward Characteristic


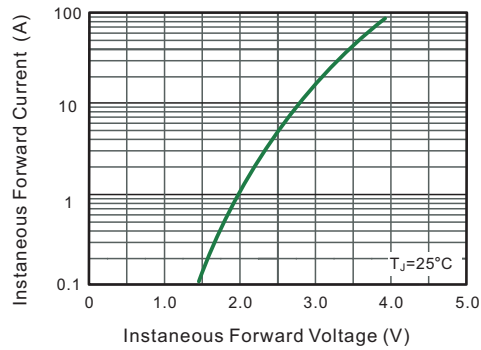



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current



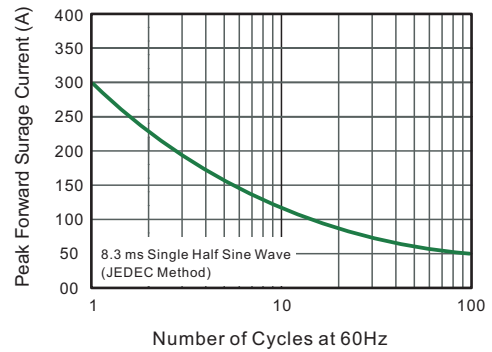

Package Outline
Through hole Package ; 2 leads


TO-247-2L

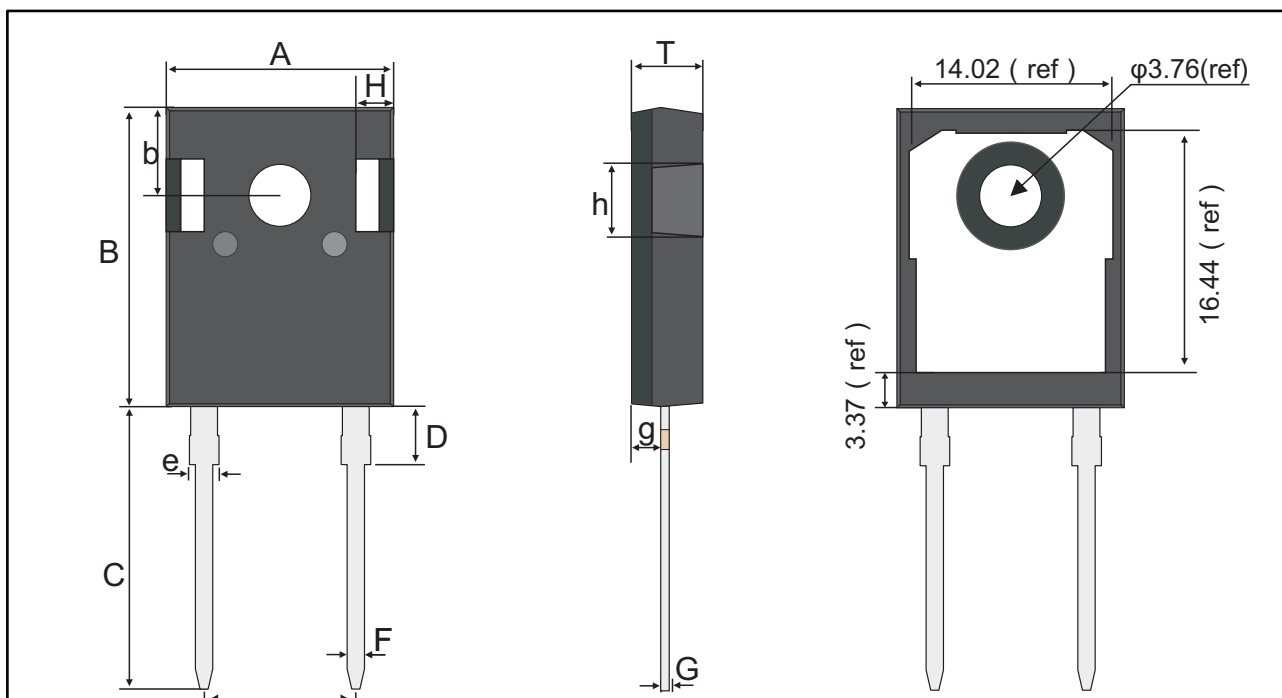

TO-247-2L mechanical data

UNIT		A	B	b	C	D	e	F	g	G	T	a	H	h
mm	max	16.01	21.18	6.26	20.2	4.25	2.2	1.3	2.49	0.7	5.2	10.98	2.71	5.37
	typ	15.81	20.98	6.16	20.0	4.15	2.05	1.2	2.39	0.6	5.0	10.88	2.51	5.17
	min	15.61	20.78	6.06	19.8	4.05	1.9	1.1	2.29	0.5	4.8	10.78	2.31	4.97
mil	max	630	834	246	795	167	87	51	98	28	205	432	107	211
	typ	622	826	243	787	163	81	47	94	24	197	428	99	204
	min	615	818	239	780	159	75	43	90	20	189	424	91	196

Marking Diagram

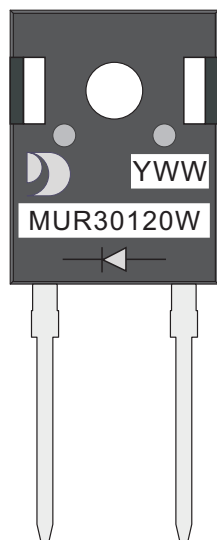

YWW: Date Code
Y:Years(0~9)
WW:Week
MUR30120W: Product name
(NOTE:The weekly code is based on the actual number of weeks in the calendar year.)



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.