



FEATURES


- Green Molding Compound (No Halogen and Antimony)
- Lower clamping voltage and excellent performance on ringing waves testing.
- Glass Passivated Chip Junction
- High Surge Current Capability
- Designed for Surface Mount Application

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

MECHANICAL DATA

- Case: MBS
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 100mg / 0.0035oz

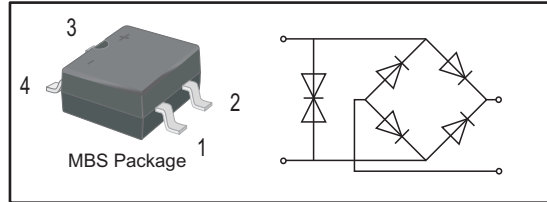

Maximum Ratings and Thermal Characteristics(TA = 25°C unless otherwise specified)
Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter of Bridge Rectifier	Symbols	STB110S	Units
Average Rectified Output Current	I_O	1.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	30	A
Maximum Forward Voltage at 1.0 A	V_F	1.1	V
Maximum DC Reverse Current at Rated DC Blocking Voltage (@VR=1000V)	I_R	5 40	μ A
Typical Junction Capacitance (f=1MHz,4V DC)	C_j	13	pF
Typical Thermal Resistance (Note1)	$R_{\theta JA}$ $R_{\theta JC}$	80 28	°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150	°C

Note: 1. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.

Parameter of TVS	Symbol	STB110S	Unit
Maximum allowable continuous AC voltage at 50-60Hz	V_{RMS}	125	V
Breakdown voltage @ 1mA	V_{BR}	190(MIN)	V
Maximum allowable continuous DC voltage	V_{DC}	170	V
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150	°C



Fig.1 Average Rectified Output Current Derating Curve

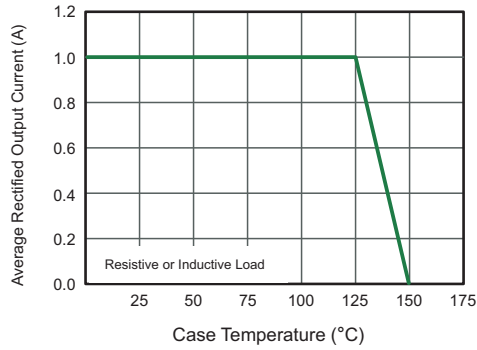


Fig.2 Typical Reverse Characteristics

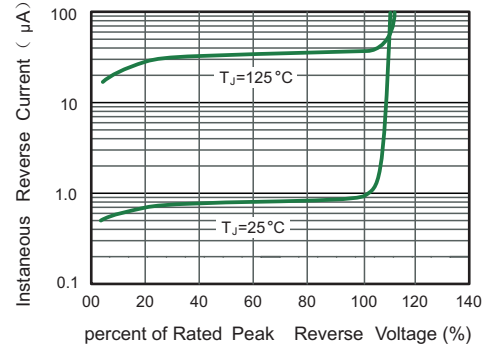


Fig.3 Typical Instantaneous Forward Characteristics

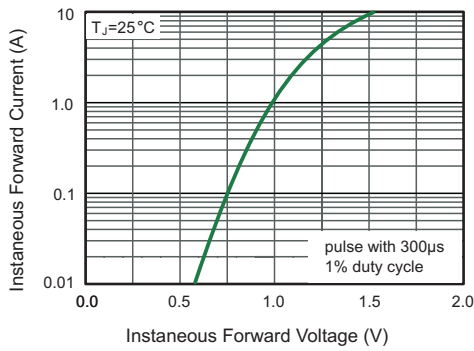


Fig.4 Typical Junction Capacitance


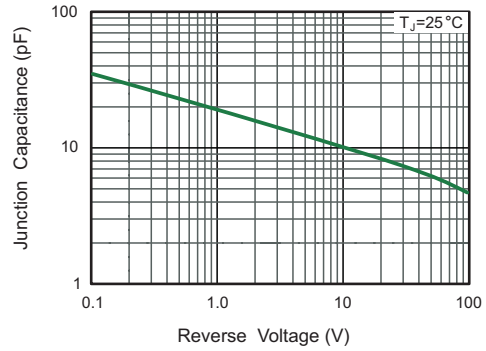


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current




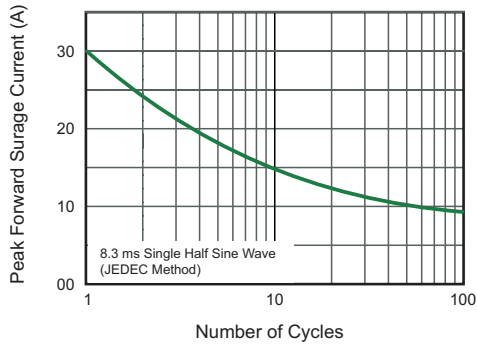


PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

MBS

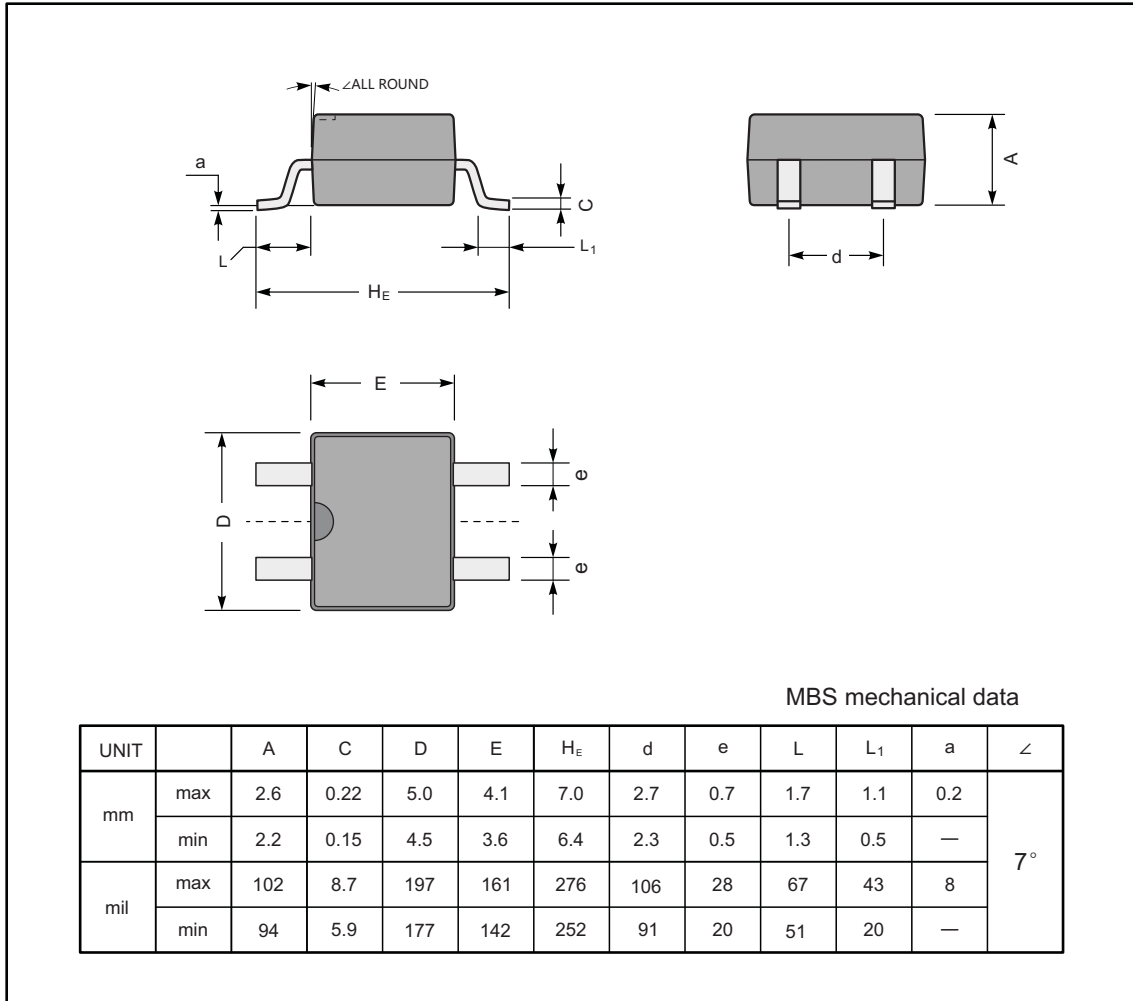

The recommended mounting pad size

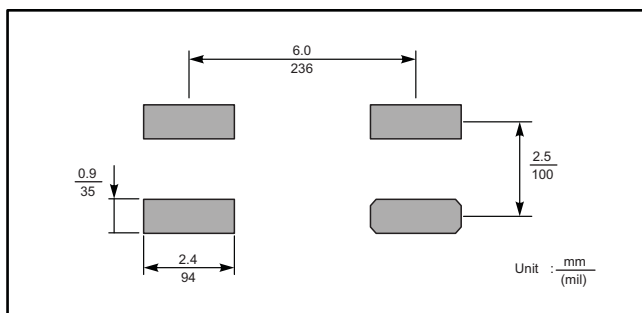

Marking

Type number	Marking code
STB110S	STB110S



文件履历表

序号	制/修订日期	生效日期	版次	修订内容	变更原因	制/修订人	备注
01	2023.11.23	2023.12.04	Rev 1.1	初版制定	/	郭金铮	



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.